

COMPOSITE OIL HOSE

**Description****Internal spiral:**

galvanized steel wire

Inner layer:

Polypropylene film

Reinforcement :

Polypropylene layer

Outer:

Corrugated PVC fabric

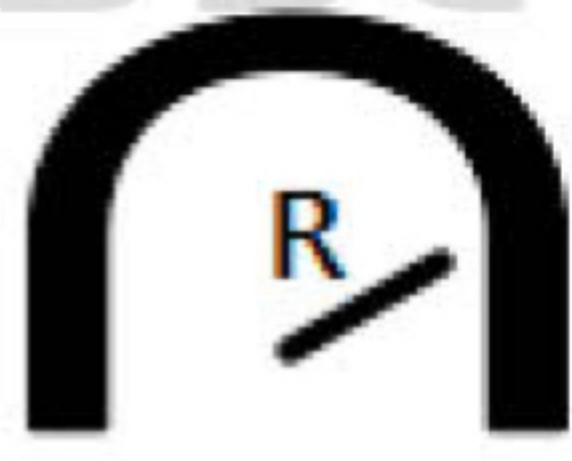

External spiral:

Galvanized spiral steel wire

Temperature:

-30°C (-86°F) to +100°C (+ 212°F)

COMPOSITE OIL HOSE

I.D	O.D	W.P	B.P	VACUUM		
(in)	(mm)	(bar)	(bar)	(bar)	(mm)	(kg/m)
2"	62	10	40	0.9	180	1.97
2 1/2"	78.5	10	40	0.9	200	2.82
3"	95	10	40	0.9	280	3.3
4"	118	10	40	0.9	400	3.96
5"	149	14	56	0.9	450	8.16
6"	180	14	56	0.9	500	10.8
8"	234	14	56	0.9	740	17.6
10"	297	14	56	0.9	920	22.5

Application Fields:

Mainly used in highway, railway tank, car tank, storage area, exchange station. Also be used for chemical plants to transport some of the harsher chemicals
Transport oil, such as gasoline, diesel, petroleum.

Product features:

Acid and alkali resistance
Corrosion resistance
Light weight with anti-static
Abrasion resistance
Good flexibility without distortion