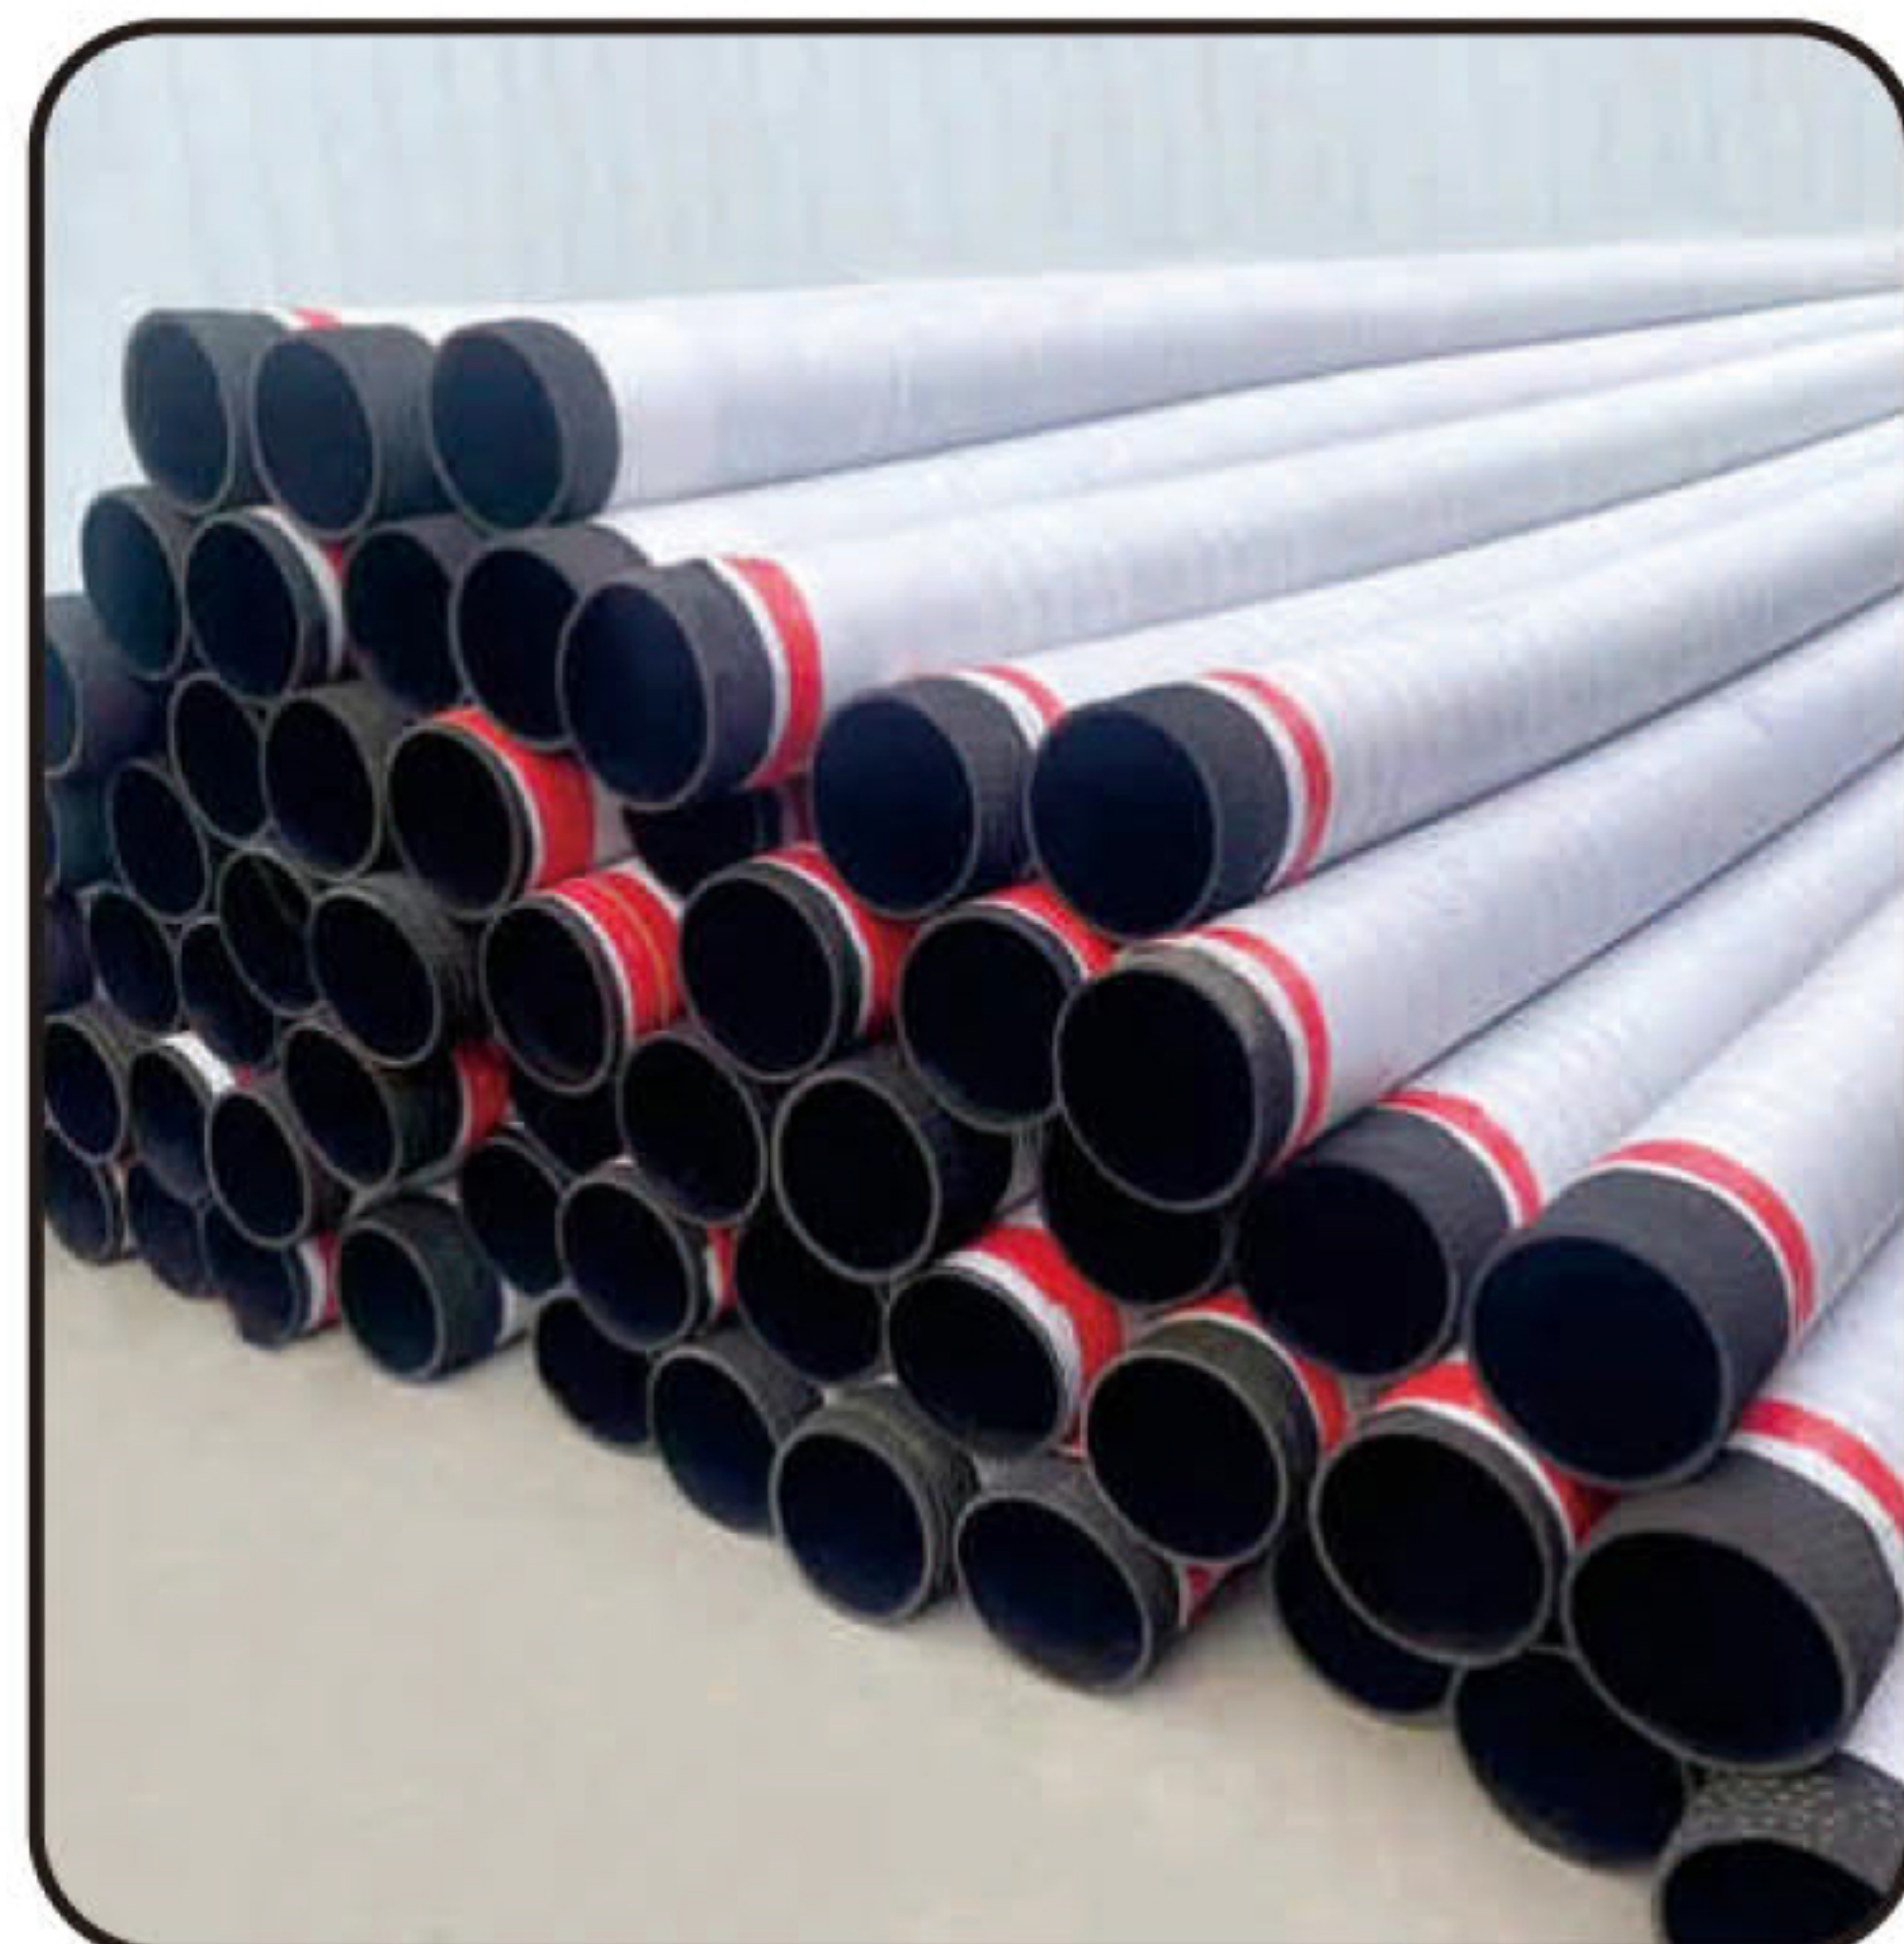


WATER SUCTION HOSE 300 PSI

**Description****Inner Tube :**

Black NR & SBR compound rubber - delivering water and liquids for long-term use.

Reinforcement Layer:

High strength synthetic fibre and helix steel wire - Meet work pressure requirements.

Cover :

SBR synthetic rubber with wrapped surface - it can work at tough condition and complex environment.

Temperature :

-40°C (-104°F) to 80°C (+176°F)

I.D		O.D	W.P		B.P		L	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/16"	4.8	12	20	300	60	900	100	330
1/4"	6.4	13	20	300	60	900	100	330
5/16"	7.9	15	20	300	60	900	100	330
3/8"	9.5	16	20	300	60	900	100	330
1/2"	12.7	22	20	300	60	900	100	330
5/8"	15.9	26	20	300	60	900	100	330
3/4"	19.1	29	20	300	60	900	100	330
1"	25.4	36	20	300	60	900	100	330
1-1/4"	31.8	44	20	300	51	750	60	200
1-1/2"	38.1	51	20	300	51	750	60	200
2"	50.8	65	20	300	51	750	60	200
2-1/2"	63.5	78	20	300	51	750	60	200
3"	76.2	91	20	300	51	750	60	200
3-1/2"	88.9	108	20	300	51	750	60	200
4"	101.6	120	20	300	51	750	60	200
5"	127	148	20	300	51	750	30	100
6"	152.4	173	20	300	51	750	30	100
8"	203.2	228	20	300	51	750	30	100
10"	254	280	20	300	51	750	12	40
12"	304.8	330	20	300	51	750	12	40